NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

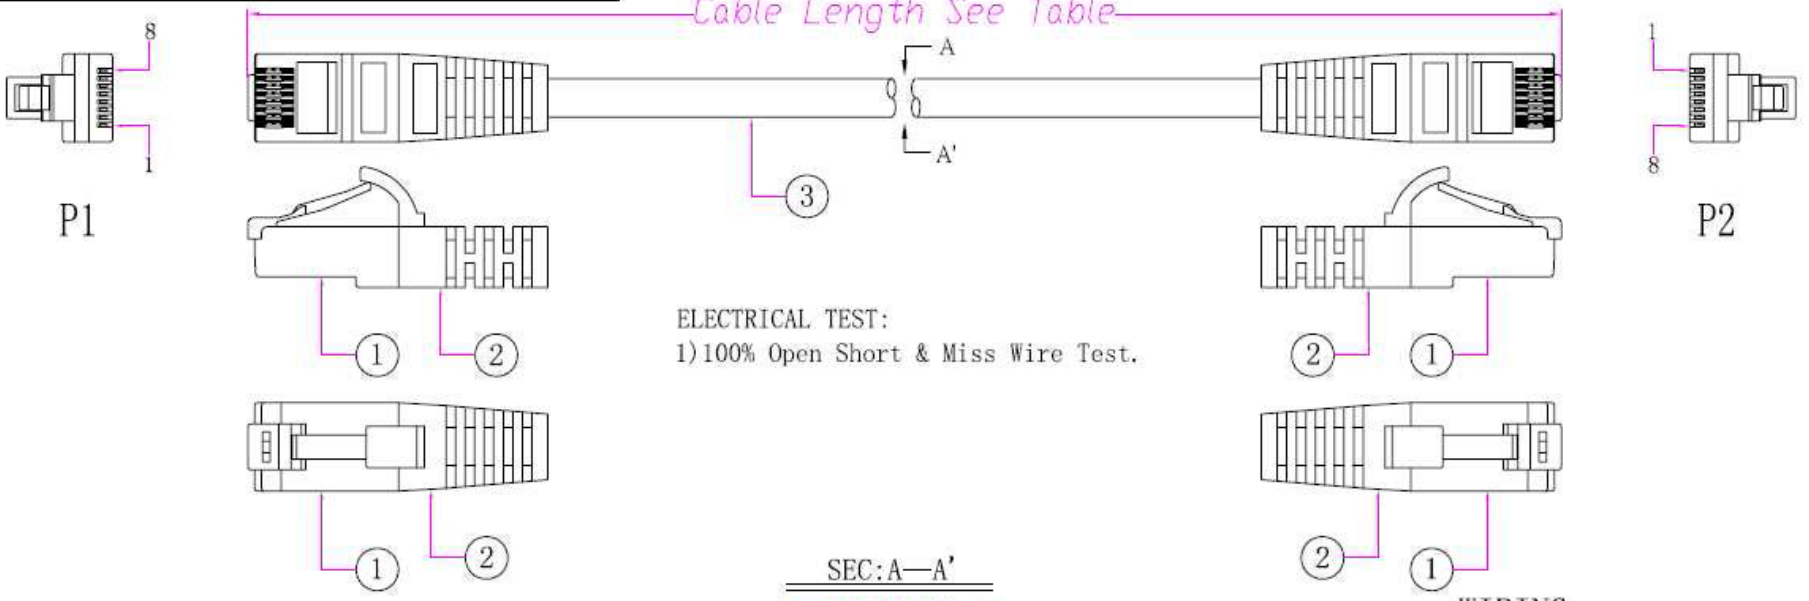

ELECTRICAL TEST:
1)100% Open Short & Miss Wire Test.

SEC:A—A'



WIRING

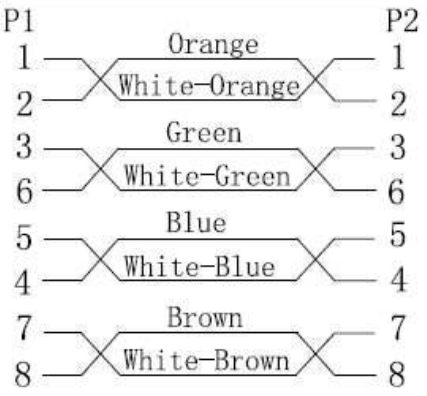

TABLE:

NO.	ITEM NO.	CABLE LENGTH	JACKET & MOLDING COLOR
1	90-C6B-XXGN	XX±XXmm	Green
2	90-C6B-XXRD	XX±XXmm	Red
3	90-C6B-XXWH	XX±XXmm	White
4	90-C6B-XXAH	XX±XXmm	Ash
5	90-C6B-XXBK	XX±XXmm	Black
6	90-C6B-XXYL	XX±XXmm	Yellow
7	90-C6B-XXBL	XX±XXmm	Blue
8	90-C6B-XXOR	XX±XXmm	Orange

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	UN.
③	CABLE CAT6	(24AWG 7/0.20mm Bare Copper + HD-PE)*4P+Filler(Cross skeleton) Jacket(PVC Color:See Table),OD:⌀6.0±0.3mm. Marking: WELTRON RoHS COMPLIANT ENHANCED 550MHZ PATCH CORD E316395 24AWG 4PR CM C(UL) 60°C VERIFIED ISO/IEC 11801 AND TIA/EIA 568B CAT6 xxxFT	1	PC
②	Molding	45P PVC,Color(See Table).		KG
①	8P8C PLUG	8P8C Plug(Transparent),The Pin Gold Plated.	2	PCS

200 Hillsboro Street, Oxford, NC 27565
919-693-1561
www.weltronproducts.com

Customer 客户:		Item NO.:	See Table
Title 品名:	8P8C PLUG TO 8P8C PLUG Cat6 UTP CABLE		
Drawing NO. 图号:	90-C6B-XX	Revision 版次:	A-1
Design 设计:	HZG	修订内容:	
Check 审查:	HuangHua	Date 日期:	2012.08.29
Tolerance 公差:	.XX(0.01)		
Approved 核准:	DHP	Units 单位:	mm
3DR		Page 页数:	1/1